
ABSIDE Networks

AI3DR™ T72 n79 Radio Unit (RU) AAU

AI3DR™ T72 n79 Radio Unit (RU) is a 5G coherent massive MIMO 3D steerable active array unit (AAU) leveraging Abside's RF-Retina™ technology and supporting the 5G waveform across all 600 MHz of the 5G NR n79 spectrum (4400 MHz through 5000 MHz) from a single unit / SKU.

The AI3DR™ array implements high-order fully digital beamforming which enables both massive MIMO 5G operation and beamforming with 3D beam steering, providing industry-leading uplink performance, throughput, and range.

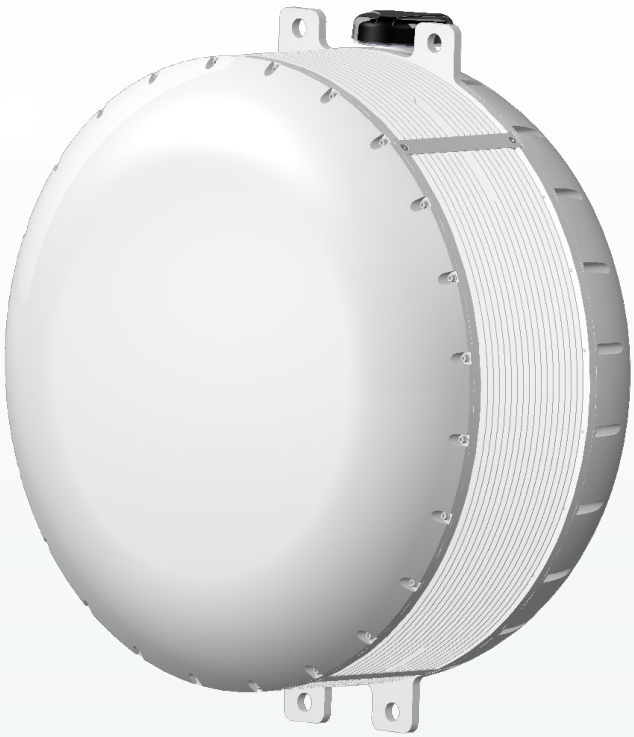

Uplink & Downlink	5G Band n79 (NATO Band IV) 4400 MHz - 5000 MHz
Integrated Antenna	+20 dBi gain Integrated Antenna 72 Active Antenna Elements Dual Slant Polarization
Scalable RF	8 Active Beams/Cells @ 2T2R
TX Power	72 W Total RF Power (36 W per polarization)
5G NR Bandwidths	10, 20, 30, 40, 50, 60, 70, 80, 90, & 100 MHz (3GPP Rel.17)
Peak Data Rates	DL +1 Gbps UL +1 Gbps
Duplex Schema	5G NR Dynamic TDD
I/O's & RU Interface	2*100GigE eCPRI with SyncE option Split 8, O-RAN 7.2 Compliant Integrated GPS for asynchronous vRAN Power -48 VDC
Environ-mentals	IP67 Design -40°C to +50°C
Size	~24" x ~24" x ~14"

- BYOD - Proven Compatibility with 5G COTS Modems
  Best in class MAC layer for optimum bandwidth sharing
- Scalable to 8 Simultaneous Active Cells @ 2T2R
  Massive MIMO for maximal TX and RX performance
- Full Digital array with 3D steerability enables gNodeB to gNodeB IAB meshing and/or air-to-ground communications

© 2026 Abside Networks, Inc.
20261105

AI3DR-72T72AE-N79 TAA Compliant
www.abside-networks.com
C-1100-00001

All rights reserved. Product features and specifications are subject to change without notice.